



ORIGINAL PRODUCT CATALOGUE

PRODUCT OVERVIEW

Tarpaulins and side curtains



Tarpaulins

for all applications.

Manufactured from:

- Cotton Duck
- PVC Coated Polyester
- Jute
- Unproofed Jute
- Polypropylene
- Polyethylene

Other types of fabric available on request.




Side curtains

Site visits made to ascertain exact measurements required.

Wide range of colours available.

All prices include standard rollers and black overcentre buckles.

Alternative rollers and over centre buckles available on request.

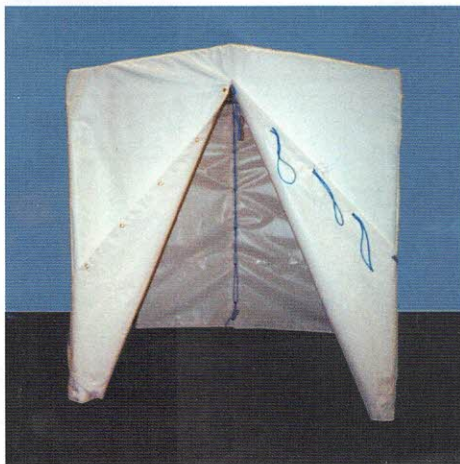

Shelter cover

- MARKET COVERS
- TRAILER COVERS
- WAREHOUSE DIVIDERS
- WELDING CURTAINS
- QUILTED BLANKETS
- BANNERS
- NETS
- POLYTARPS
- SHELTER COVERS

ALL SHEETS ARE MADE TO CUSTOMERS OWN SPECIFICATION

Typical applications

Heavy duty PVC sheeting

Linked together to form long-lasting protective covers.



Market stall covers manufactured by PGS.



Fitted cover to customer specification




Sludge digestion tank covers at Severn Trent Water Authority site.



PGS staff producing a stenciled sheet to customer specification.

Netting

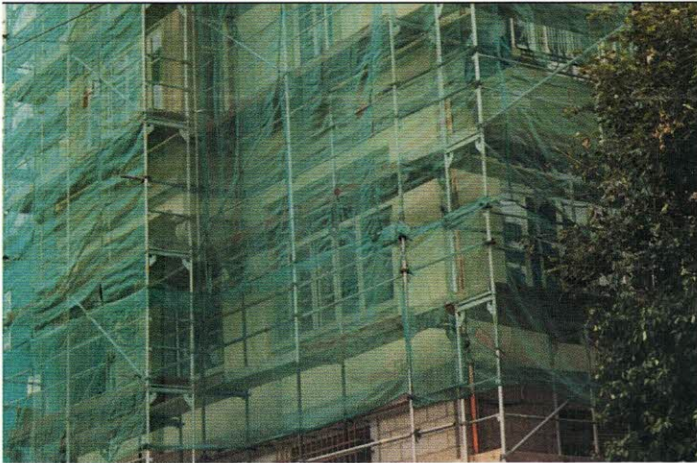

Debris netting

- Available in roll form
- Close polyethylene mesh
- Low weight




Close mesh

Close mesh nets can be made to any size and come complete with PVC border, eyelets and ropes.

- CLOSE MESH
- BRICK NETS
- SKIP NETS
- BULK TIPPER
- DEBRIS NETTING

Skip nets

2" square mesh rigged with 8mm polypropylene rope and fitted with rope ties.



Brick nets

2.5" square mesh rigged with 8mm blue polypropylene rope and fitted with rope ties.



Miscellaneous Netting

Many other types of netting are available including PVC-coated.

Extensive range of fabrics available

Reference	Description	Typical applications	Standard width of roll (cm)	Weight (g/m2)
CD 475	475gsm (14oz) cotton duck	lorry covers, stall covers	91	475
CD IMP 475	475gsm (14oz) imported cotton duck	lorry covers, H/D protective covering	91	475
CD 509	509gsm (15oz) cotton duck	lorry covers, stall covers	91	509
CD IMP 509	509gsm imported cotton duck	lorry covers, H/D protective covering	91	509
CD FWR	fire retardant cotton duck	welding screens	91	475
RG 407	407gsm (12oz) regentex	lorry covers	91	407
RG 543	543gsm (16oz) regentex	lorry covers	91	543
LYN 407	407gsm (12oz) lyntex	lorry covers	91	407
PE440/FR	440gsm pvc coated polyester	banners, stall covers	153	440
PE550	550gsm pvc coated polyester	lorry covers, stall covers, banners	150 & 250	550
PE610	610gsm pvc coated polyester	lorry covers, stall covers, banners	155	610
SIDE/850	pvc coated polyester sidecurtain fabric	side curtains	265	850
JUTE 543	543gsm proofed jute	covering of tarmac	91	543
UP JUTE	unproofed jute	covering of tarmac	91	509
PU NYL 140	140gsm (4oz) pu nylon	banners	150	140
PU NYL	(7oz) pu nylon	banners	150	
POLYPROP	polypropylene	skip covers, frost protection	450	
POLYETH	polyethylene	stall covers	183	120
POLYWOVE	heavy duty woven polyethylene	stall covers	200	260
NYLON/L	loomstate nylon	flexible sleeves	145	
DENIM	denim	money aprons, bags	150	
POL/CL	polished clear	clear side sheets	65 & 130	
DEB NET	polyethylene debris netting	skip covers	366	100

STANDARD FABRICS

Colour codes:

● GR	=	green
● BL	=	blue
● YE	=	yellow
● BR	=	brown
● OR	=	orange
● RD	=	red
● BK	=	black
● GY	=	grey
● WH	=	white

The above are some of the more popular fabrics readily available.

The list is by no means comprehensive.

If you require something different

please telephone the sales desk on

0114 276 5566

for more information.

Load Restraints

Choosing the correct style

1. Introduction

1.1

It is vital that loads carried on vehicles are properly controlled. The loss to the carrier may be substantial and involve:


- (a) Penalties for late delivery.
- (b) Claims for damaged goods.
- (c) Claims from third parties arising from accidents.
- (d) Breaches of load traffic control.

1.2

This guide aims to explain the principles of controlling loads on vehicles and provides some helpful information about the choices and use of load control equipment.


1.3

It is recommended that reference should be made to the Department of Transport's code of practice booklet; 'Safety of loads on vehicles' (available from H.M.S.O.).

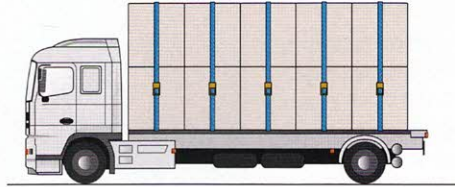


Heavy duty load

Used for restraining heavier loads such as machinery, metal work, concrete pipes etc...

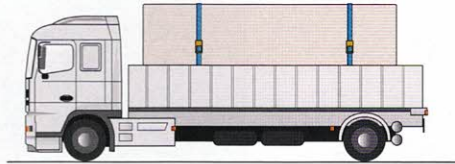

Light duty load

Used to retain small loads such as motorcycles, suitcases, packing materials and many other small loads.

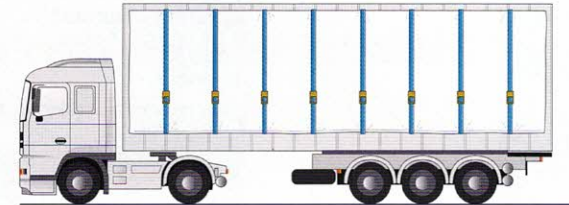


Curtain sided vehicle straps

Used for threading through the vehicle side material to strengthen and operate the curtain.



Internal cargo restraint

Used with in box vans to secure all types of loads to the side of the vehicle.

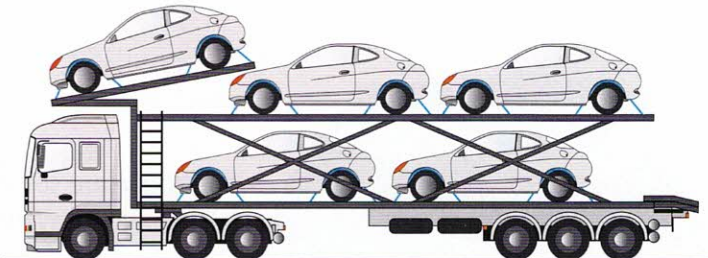

Car transporter

Specially designed system to retain vehicles to transporter.

Heavy duty load restraint equipment

Ratchet assemblies - 10,000 Kg.



A choice of popular end fittings.




Specification:

Break Strength:	10,000kg
Rated Assembly Strength (RAS):	5,000kg
Webbing:	75mm 100% Polyester
Length Fixed End:	30cm
Overall Working Length:	4mt, 6mt, 8mt, 10mt or to customers own specification
Ratchet:	RB 75100
End Fittings:	CH 75100, DR 75100


Ratchet assemblies - 5,000 Kg.

PGS 5,000kg ratchet tensioners are manufactured in accordance to BS5759 Part 2 using our well proven long wide handled ratchet and 100% polyester webbing. Lashing assemblies can be supplied to customers individual specification with a choice of popular end fittings.

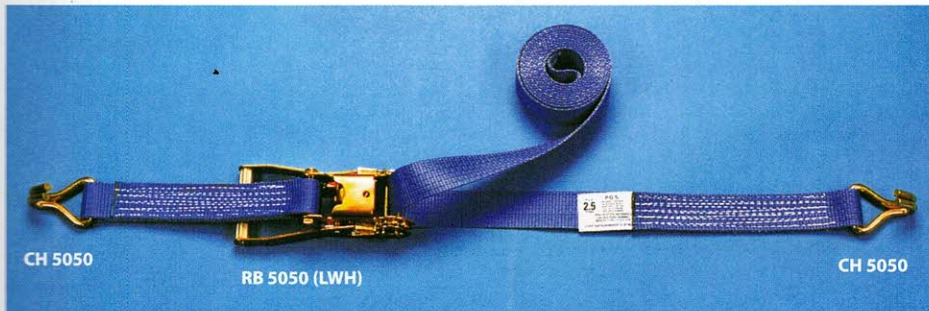

Specification:

Break Strength:	5,000kg
Rated Assembly Strength (RAS):	2,500kg
Webbing:	50mm 100% Polyester
Length Fixed End:	30cm
Overall Working Length:	4mt, 6mt, 8mt, 10mt or to customers own specification
Ratchet:	RB 5050 long wide handle
End Fittings:	<ul style="list-style-type: none"> • Delta Ring DR 5050 (DF) • Claw Hook CH 5050 • Rave Hook RH 5050 • Twisted Snap Hook TSH 5050 • Claw Hook (Tube) CH 5050 (Tube) • Res - Q Link RL 5050 • Chain Link CL 5050




Wear protectors



Loadbinders, chains & hooks



Standard loadbinder

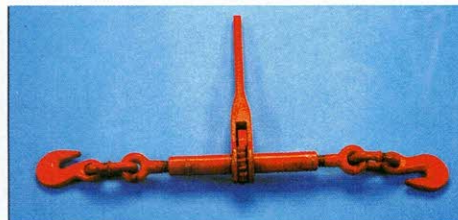

Ratchet loadbinder



Loadbinder chain & hook

Light duty straps

35mm ratchet straps

The 35mm ratchet tensioner bridges the gap between traditional 5,000kg systems used by the road transport industry and the lightweight 25mm hobby tensioners. A low cost assembly can be produced for medium sized vehicles and trailers. It also fulfills the growing need for restraint equipment within factory and warehouse environments.



Specification:

Break Strength:	3,000kg
Rated Assembly	
Strength (RAS):	1,500kg
Webbing:	35mm Polyester
Length Fixed End:	30cm
Overall Working Length:	4mt, 6mt, 8mt, 10mt or to customers own specification
Ratchet:	RB 3530
End Fittings:	CH 3530, DR 3530




25mm ratchet straps

The 25mm lightweight ratchet assemblies are ideal for retaining loads on small trailers, roof-racks and within box vehicles where lighter loads need restraining or a 5,000kg assembly would be too cumbersome.



Specification:


Break Strength:	1,000kg
Rated Assembly	
Strength (RAS):	500kg
Webbing:	25mm Polyester
Length Fixed End:	30cm
Overall Working Length:	4mt, 6mt, 8mt, 10mt or to customers own specification
Ratchet:	RB 2510
End Fittings:	CH 2510, DR 2510

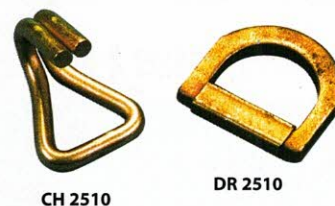

ALL RATCHET ASSEMBLIES AND OVERCENTRE STRAPS CAN BE MANUFACTURED TO ANY LENGTH AND SUPPLIED WITH ALTERNATIVE RATCHETS, BUCKLES OR END FITTINGS.

Ratchets, buckles & end fittings

Ratchets

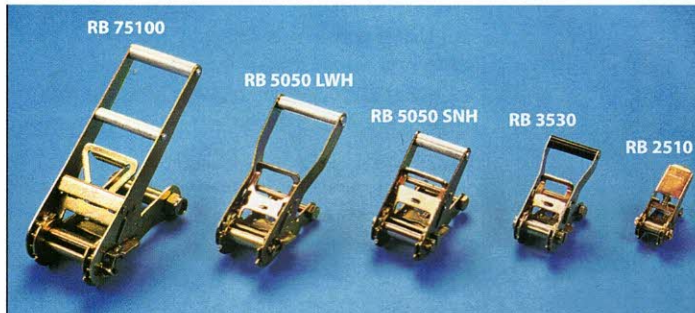

RB 75100

- 75mm Ratchet
- 75mm Webbing Width
- 10,000kg Break Strength

RB 5050 LWH

- Long Wide Handled Ratchet
- 50mm Webbing Width
- 5,000kg Break Strength

RB 5050 SNH

- Short Narrow Handled Ratchet
- 50mm Webbing Width
- 5,000kg Break Strength

RB 3530

- 35mm Ratchet
- 35mm Webbing Width
- 3,000kg Break Strength

RB 2510

- Lightweight Ratchet
- 25mm Webbing Width
- 1,000kg Break Strength

Overcentre buckles



OCB L

- Locking Overcentre Buckle
- 50mm Webbing Width
- 2,000kg Break Strength

OCB SSL

- Locking Stainless Steel Overcentre Buckle
- 50mm Webbing Width
- 1,000kg Break Strength

OCB ZNC

- Zinc Plated Overcentre Buckle
- 50mm Webbing Width
- 600kg Break Strength

OCB BLK

- Black Coated Overcentre Buckle
- 50mm Webbing Width
- 600kg Break Strength

Cam buckles



CB 25



CB 50

CB 25

- Heavy Duty Cam Buckle
- 25mm Webbing Width
- 600kg Break Strength

CB 50

- Heavy Duty Cam Buckle
- 50mm Webbing Width
- 1,300kg Break Strength



End fittings

Part N°	Description	Webbing Width	Break Strength
CH 75100	Claw Hook	75mm	10,000kg
DR 75100	Delta Ring	75mm	10,000kg
CH 5050	Claw Hook	50mm	5,000kg
CH 5050 (Tube)	Claw Hook (Tube)	50mm	5,000kg
RH 5050	Rave Hook	50mm	5,000kg
TSH 5050	Twisted Snap Hook	50mm	5,000kg
DR 5050 (DF)	Drop Forged Delta	50mm	5,000kg
RL 5050	Res Q Link	50mm	5,000kg
CL 5050	Chain Link	50mm	5,000kg
CH 3530	Claw Hook	35mm	3,000kg
DR 3530	Delta Ring	35mm	3,000kg
CH 2510	Claw Hook	25mm	1,000kg
DR 2510	D Ring	25mm	1,000kg
WR 5010	Welded Ring	50mm	1,000kg
WR 7515	Welded Ring	50mm	1,500kg
3BS 5010	3 Bar Slide	50mm	1,000kg
FSH 5023	Flap Snap Hook	50mm	2,300kg
CH 5010	Claw Hook	50mm	1,000kg
CH 5020	Claw Hook	50mm	2,000kg
CRH 5010	Closed Rave Hook	50mm	1,000kg

Side curtain vehicle straps & accessories

Internal cargo straps



The standard universal overcentre strap is supplied with either flat snap hook or 75mm ring end fitting for use in curtain sided vehicles with centre poles. Fully adjustable with 3 bar slide for safe, secure load retention.

Specification:

Webbing:	Black Polypropylene
Overcentre:	OCB ZNC or OCB BLK
End Fitting:	FSH 5010 Snap Hook or WR 7515 Ring
Working Length:	4.25mt



Side curtain tension straps

A choice of three standard straps for tensioning vehicle side curtains.

Specification:

Webbing:	Black Polypropylene
Overcentre:	OCB ZNC or OCB BLK
End Fitting:	CRH 5010

Box vehicle straps


Internal box vehicle strap utilising our standard overcentre buckle with claw hook end fittings for safe secure load retention.



Specification:

Webbing:	Black Polypropylene
Overcentre:	OCB ZNC or OCB BLK
End Fitting:	CH 5010
Length Fixed End:	90cm
Overall Working Length:	3.05mt

Internal box vehicle strap with locking overcentre buckle and claw hook end fittings for safe secure load retention.

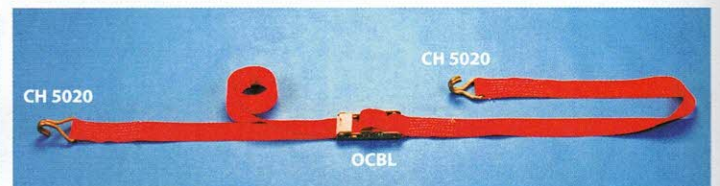


Specification:

Webbing:	100% Red Polyester
Overcentre:	OCBL
End Fitting:	CH 5020
Length Fixed End:	90cm
Overall Working Length:	3.05mt



Webbing


All types of webbing are available. 100% Polyester Webbing is used for the production of heavy duty straps and ratchet assemblies.

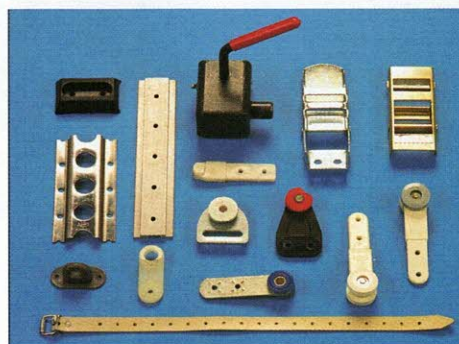

Accessories for side curtains



Car transport strap



Assorted rollers

Rope, twines, elastic

Polypropylene rope

220 metres per coil

- 4mm diam. **PPR4**
- 6mm diam. **PPR6**
- 8mm diam. **PPR8**
- 10mm diam. **PPR10**
- 12mm diam. **PPR12**
- 14mm diam. **PPR14**
- 16mm diam. **PPR16**
- 18mm diam. **PPR18**


Sheet ties

- Normally 1.8m (6') or 2.7m (9') but any size available on request



27m (90') Lorry ropes LR90

- 10mm blue polypropylene rope with eye on one end

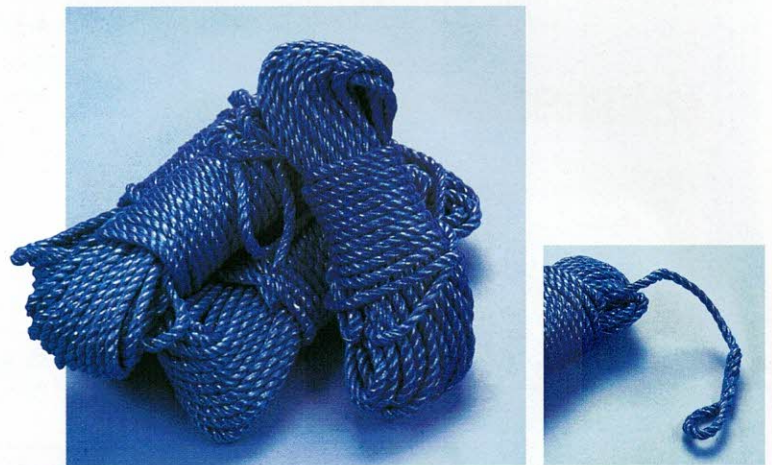

Elastic shock cord

- 6mm diam. **ESC6**
- 8mm diam. **ESC8**
- 10mm diam. **ESC10**

Elastic mini ties

- 14cm length **EMT14**
- 24cm length **EMT24**
- 60cm length **EMT60**

Spiral hook assemblies

- 45cm lengths **SHA45**
- 60cm lengths **SHA60**
- 90cm lengths **SHA90**



Lifting slings

all slings are manufactured from a high tenacity polyester webbing to British Standards.



A. Soft eyed webbing slings

The eyes, or loops are an important feature of this range, making good contact with the lifting hook without the use of metal fittings. The flat eye also makes for easy withdrawal from beneath loads. Commonly used for basket lift, but a choker lift can be also be made by passing one eye through the other.



B. Endless webbing slings

These belt slings are probably the most versatile and widely used sling. For direct connection, choker or basket lifts can also be made. Since load contact points can be changed with every lift, wear is evenly distributed and sling life is accordingly prolonged. The specified length of the endless sling is by circumference.

Sling types A & B are available in "DUPLEX" (double thickness) where the safe working load is doubled from the single SWL.








C. Endless round slings

A continuous woven hank of yarn protected by a seamless outer layer the round slings are used for many types of lifting applications. Similar to the endless belt slings, direct connection, choker or basket lifts can be made and since load contact points can be changed with every lift wear is evenly distributed and the life is accordingly prolonged.

Flat webbing slings






When using a sling by any of the following lifting methods the safe working load is adjusted accordingly as follows:

Straight	Choke	Basket 0°	Basket 0-90°	Basket 120°	Single sling	Endless & Duplex slings	
							
Kg	Kg	Kg	Kg	Kg	width (mm)	width (mm)	colour
500	400	1,000	700	500	25	*	● black
1,000	800	2,000	1,400	1,000	50	25 & 50	● violet
1,500	1,200	3,000	2,100	1,500	75	*	● white
2,000	1,600	4,000	2,800	2,000	100	50	● green
3,000	2,400	6,000	4,200	3,000	150	75	● yellow
4,000	3,200	8,000	5,600	4,000	200	100	● grey
5,000	4,000	10,000	7,000	5,000	250	125	● red
6,000	4,800	12,000	8,400	6,000	300	150	● brown
8,000	6,400	16,000	11,200	8,000	SG400	200	● blue

* Denotes Sling not available

Round slings

When using a sling by any of the following lifting methods the safe working load is adjusted accordingly as follows:

Straight	Choke	Basket 0°	Basket 0-90°	Basket 120°	Zebra sling	
 Safe working load in straight pull						
Kg	Kg	Kg	Kg	Kg	av. diam. (mm)	colour
1,000	800	2,000	1,400	1,000	18	● violet
2,000	1,600	4,000	2,800	2,000	20	● green
3,000	2,400	6,000	4,200	3,000	22	● yellow
4,000	3,200	8,000	5,600	4,000	25	● grey
5,000	4,000	10,000	7,000	5,000	27	● red
6,000	4,800	12,000	8,400	6,000	32	● brown
8,000	6,400	16,000	11,200	8,000	38	● blue
10,000	8,000	20,000	14,000	10,000	46	● orange

Stall covers



Stall covers

Manufactured to individual specification from a wide range of fabrics including:

- CANVAS
- PVC
- HEAVY DUTY 1" STRIPE POLYETHYLENE
- MOST COLOURS AVAILABLE



Roundabout cover



Market stall covers



Fairground cover



Polyethylene tarpaulins

Waterproof tarpaulins, hot welded seams, complete with eyelets every 90cm, no ropes.

Colours available:

- White - **WH**
- Blue - **BL**
- Red/white striped - **RW**
- Green/white striped - **GW**

Apply this suffix to the codes below in order to indicate the colour you require. (Eg: **PT129WH**)

Sizes available:

Nominal Size (m)	Nominal Size (ft)	Code
• 3.6 x 2.7	12' x 9'	PT129
• 5.4 x 3.6	18' x 12'	PT1812
• 6.0 x 4.5	20' x 15'	PT2015
• 7.0 x 5.4	23' x 18'	PT2318
• 9.0 x 7.0	30' x 23'	PT3023
• 11.0 x 7.0	36' x 23'	PT3623
• 14.0 x 9.0	46' x 30'	PT 4630



Roundabout skirting

Market supplies

Clear window sheets

Finish Size (m)	Finish Size (ft)	
• 4.6 x 1.8	15' x 6'	CWS 156
• 4.3 x 1.8	14' x 6'	CWS 146
• 3.7 x 1.8	12' x 6'	CWS 126
• 3.1 x 1.8	10' x 6'	CWS 106
• 2.5 x 1.8	8' x 6'	CWS 86
• 1.8 x 1.8	6' x 6'	CWS 66
• 4.3 x 2.2	14' x 7'	CWS 147
• 3.7 x 2.2	12' x 7'	CWS 127
• 3.1 x 2.2	10' x 7'	CWS 107
• 2.5 x 2.2	8' x 7'	CWS 87

Other sizes available on request.



Money aprons


Manufactured from high quality denim with choice of fastening and number of pockets.

• 4 pocket D ring 2 zip	4P DR 2Z
• 4 pocket clip fastener 2 zip	4P CF 2Z
• 4 pocket single tie 2 zip	4P ST 2Z
• 6 pocket D ring 2 zip	6P DR 2Z
• 6 pocket clip fastener 2 zip	6P CF 2Z
• 6 pocket clip fastener 4 zip	6P CF 4Z

Other types available on request.



Carrier bags

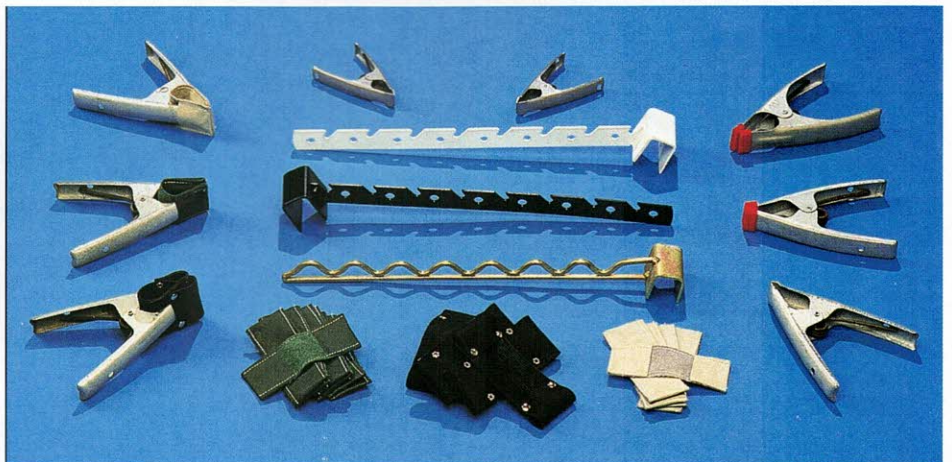

Hangers and clips

Call or fax for a quote on
TEL 0114 276 55 66
FAX 0114 276 52 65

Banners, flags, bunting

P.G.S. SHEFFIELD
THE PREMIER BANNER SERVICE
☎ 2765566




Banners

- Manufactured from various types of fabric
- All sizes available
- Wide range of colours
- Ideal for hand and screen printing



Flags

- Union Flag
- St. George's Cross
- St. Andrew's Cross
- St. Patrick's Cross
- St. David's Cross
- International Flags
- Flags are normally supplied in 2:1 proportion
- Flag flying diary available on request

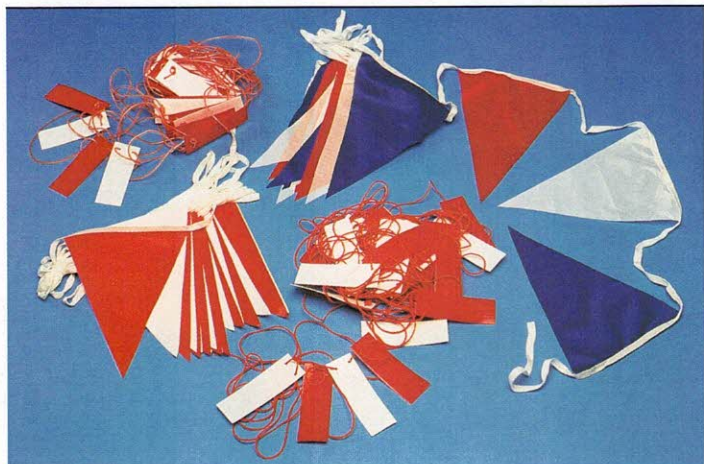

Bunting

- Red/White/Blue
- Multi coloured
- 11m lengths incorporating 21 polyester pennants
- Pendants are 13" x 10" sewn onto a strong white tape

Traffic management

Road signs

- Road works ahead
- Keep right
- Keep left
- Road narrows

The above are just a small selection of the many signs available in metal or plastic. Frames can also be purchased to suit the above.



Traffic cones

- 450mm
- 540mm
- 750mm

Warning tapes

- Glo-tape - 20mm x 25m roll approx.
- Zebra tape - 70mm x 100m roll
- Pendant barrier marker - 32 red and white plastic markers suspended on a 26m plastic cord

Road lamps

- Mini lites
- Swivel head



Line marking

- Aerosol paint - available in a wide range of colours 600ml or 750ml
- hand held applicators
- 1 wheel applicators
- 2 wheel applicators
- 4 wheel applicators



Digging tools



Shovels

Wide range of shovels available from leading brand names.

- Square mouth shovels
- Round mouth shovels
- Taper mouth shovels
- Trenching shovels
- Cable laying shovels
- Grafting tools

The above are just a small selection of shovels readily available. Many other types are available on request.

Wheelbarrows


- 85 litres (3 cu.ft.) black pneumatic tyred wheelbarrow. Toughness, durability, balance and reliability make this the ideal wheelbarrow for the contractor.



Picks and shafts

Blade format

A whole variety of blades are available depending on the task.

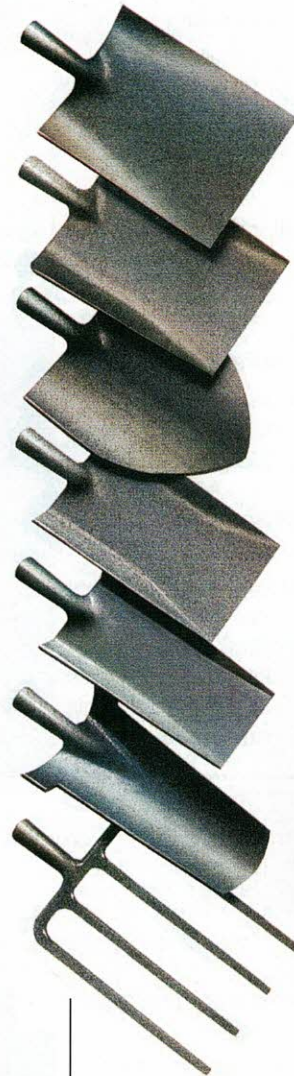

Square Mouth

For shovelling and backfilling, concrete mixing, and working with Tarmac.

Taper

A shovel which is preferred in certain regions for doing the same tasks.

Round

For use in gravel and other loose material as its round point pierces the material more efficiently.

Trench

Can be used for digging and shovelling. Ideal for narrow trench work.

Cable

Specially designed for digging and bottoming out narrow trenches for cables.

Drainer

Ideal for digging pipe and drain channels and post holes.

Fork

Ideal for breaking ground and for use in heavy clay or stony soil.

Blade sizes

Shovels are available in a number of blade sizes as follows:

- **Size 000** 200mm (8") X 265mm (10.5")
- **Size 0** 230mm (9") X 290mm (11.5")
- **Size 1** 240mm (9.5") X 305mm (12")
- **Size 2** 255mm (10") X 320mm (12.5")
- **Size 4** 280mm (11") X 342mm (13.5")
- **Size 6** 305mm (12") X 370mm (14.5")
- **Size 8** 330mm (13") X 395mm (15.5")
- **Size 10** 355mm (14") X 420mm (16.5")

PGS stock the most popular sizes.

Others are available to special order.

Hand tools

Hammers, picks, shafts & rakes



Hammers

- 2LB Lump **H2L**
- 4LB Lump **H4L**
- 7LB Sledge **H7SL**
- 10LB Sledge **H10SL**
- 14LB Sledge **H14SL**



Picks and shafts

- 36" Hardwood shaft **P36HS**
- 7LB Point & Chisel **P7PC**




Rakes

- Bulldog 16 tooth wooden handle **RAK 1**
 - 16 tooth round wooden handle **RAK 2**
 - 16 tooth square wooden handle **RAK 3**
- Other rakes available

Measuring equipment

Measuring tapes

- 5M Metal tape **MT5M**
- 8M Metal tape **MT8M**
- 30M Cased Fibron Tape **FT30M**
- 2M Folding wooden rule **FWR2M**

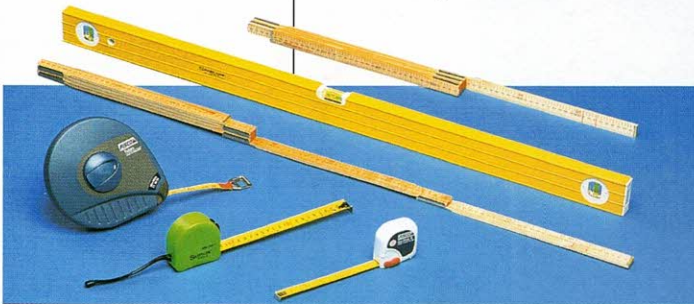

Trumeter

Underground detection

- **Cable avoiding tools**
 Ideal for detection of underground pipes and cables as an essential preliminary stage to any excavating works.

Painting & decorating

Dust sheets



Paint brushes and silicone sealants



Torches

Contractors site equipment



Electrical appliances

- Fridges
- Microwaves
- Toasters
- Site heaters / fans

All types of electrical appliances available at competitive prices from market leaders.



Canteen equipment

- Crockery
- Cutlery
- Electrical appliances
- Kettles
- Teapots



Packing materials

- Carrier bags
- Bin liners
- Sealing tapes
- Twine



Miscellaneous

- STATIONERY
- LADDERS
- HOSES
- BUCKETS
- BINS
- ROPES, TWINES, ELASTIC
- CAMERAS
- LOCKS
- LINES
- WATER CONTAINERS
- PUMP SPRAYS
- INDUSTRIAL WIPERS
- OIL DRY



Janitorial supplies



Cleaning materials

- Washing-up liquid
- Multi-surface cleaner
- Bleach
- Disinfectant
- Polish
- Air freshener
- Glass cleaner
- Toilet blocks
- Soap



Distributors for DEB

- Tufanega
- Swarfega
- Lanimol
- Janitol
- Jizer
- Traffic film remover



General

- Dusters
- Dishcloths
- Soap dispensers
- Dust sheets
- Refuse sacks
- Toilet rolls
- Polytarps



Floor care

- Brushes
- Buckets
- Bins
- Mops
- Wipers



Personal protection equipment



General

- Gloves
- Safety helmets
- Dust masks
- Ear defenders
- Safety glasses or goggles
- Safety harnesses



Health and Safety

- First aid kits
- Ear protection
- Eye protection
- Dust masks and respirators



Safety and non-safety footwear WIDE RANGE AVAILABLE

- Rigger boots
- Dr Martens
- Chukka boots
- Foundry boots
- Wellingtons
- Kickers
- Caterpillar

High visibility clothing



HVSSJ C3

- High visibility short sleeved jacket .
- Conforms to EN471 class 3.



HVFSJ C3

- High visibility sleeved jacket.
- Conforms to EN471 class 3.



HVC C3

- High visibility fleeced coat.
- Conforms to EN471 class 3.

EN471 garment classifications

Garment types are grouped into three classes based on the conspicuity provided, with the classes dictating the minimum quantities of background and retro-reflective materials to be used.

CLASS 3:

HIGHEST PROTECTION LEVEL

Bonds of retro reflective material shall not be less than 50mm wide. Minimum background material 0.8m² minimum retro reflective material 0.2m².

CLASS 2:


INTERMEDIATE PROTECTION LEVEL

Bonds of retro reflective material shall not be less than 50mm wide. Minimum background material 0.5m² minimum retro reflective material 0.13m².

CLASS 1:


LOWEST PROTECTION LEVEL

Where enhanced visibility is an advantage, but for minimal risk / off road purposes only. Minimum background material 0.14m². Minimum retro reflective material 0.10m².

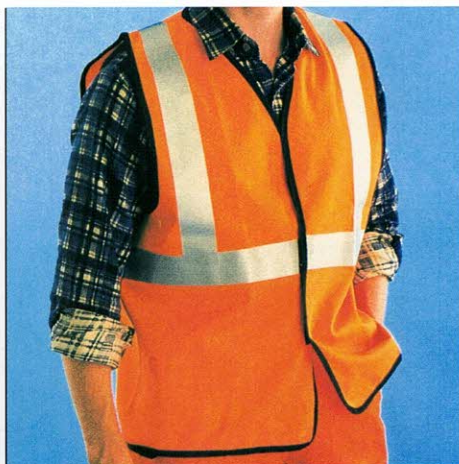

HVNSW C2

- High visibility sleeveless waistcoats.
 - Conforms to EN471 class 2.
- Available in yellow and orange.

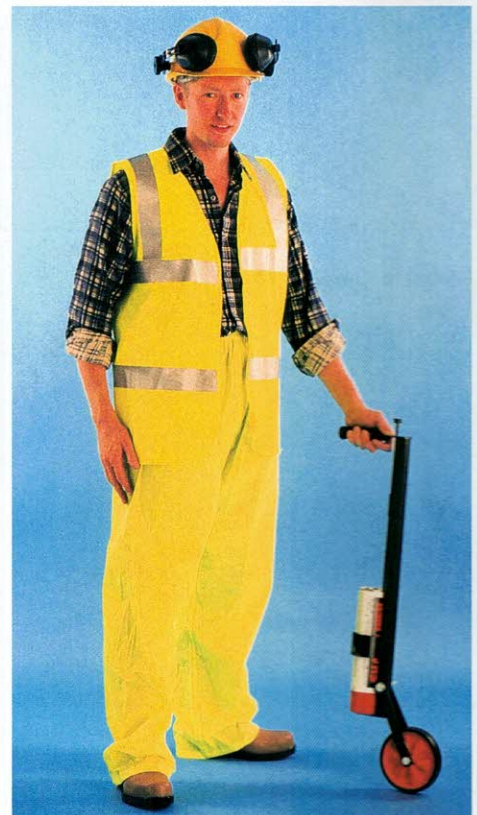


Workwear

Polycotton
sweatshirt



Polycotton
polo shirt

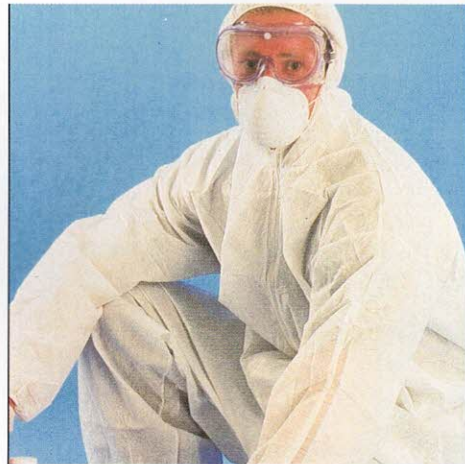

The facility is available
for a company's own name
and/or logo to be affixed
to the garment.



Polycotton/cotton
drill boilersuits



Disposable over-
alls




Imported cotton
drill trousers



British made polycotton trousers



British made
polycotton jacket

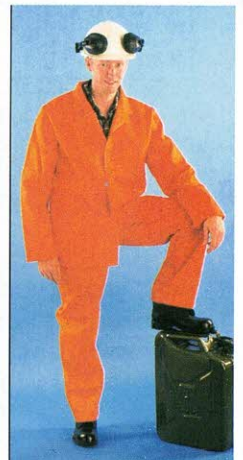

Polycotton jacket
and trouser set

Workwear




Parka coat



Body warmers



High visibility mesh waistcoat

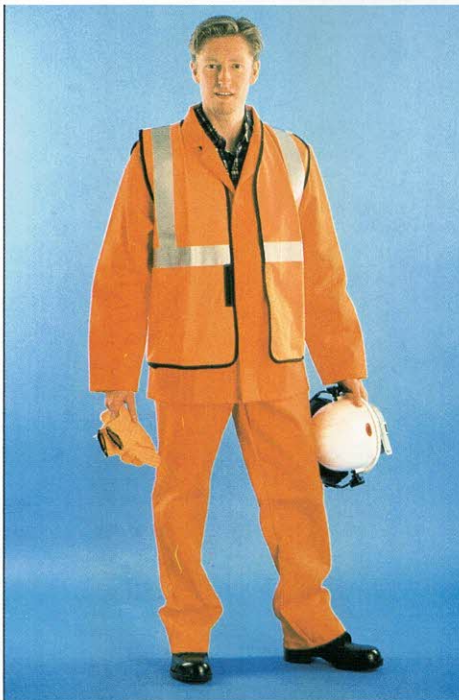

High visibility waistcoat

SIZING CHART

Size designation is to European standard ISO 3635 - 1981. The nearest equivalent imperial and metric sizes are also included on the neck label. The measurements are to European standard prEN 3400 - 1992 for protective clothing and the British Standard BSI 5426 - 1993 workwear. These measurements are for the wearers body size and not measurements of finished garments. All neck labels have a girth and height measurement e.g. waist and inside leg measurement.









GIRTH Measurement Conversion Chart			
Euro Sizing (cm) prEN 340 - 1992	British Sizing (cm) BSI 5426 - 1993	IMPERIAL (Inches) EQUIVALENT	EURO SIZE
68-72	72	28	38
72-76	76	30	40
76-80	80	32	42
80-84	84	33	43
84-88	88	34	44
88-92	92	36	46
92-96	96	38	48
96-100	100	40	50
100-104	104	41	51
104-108	108	42	52
108-112	112	44	54
112-116	116	46	56
116-120	120	47	57
120-124	124	48	58
124-128	128	50	60
128-132	132	52	62
132-136	136	54	64
136-140	140	56	66
140-144	144	58	68
144-148	148	60	70

HEIGHT Measurement Conversion Chart		
Euro Sizing (cm) prEN 340 - 1992	British Sizing (cm) BSI 5426 - 1993	Inside Leg (cm) MEASUREMENTS
152-164	Short (S)	74
164-176	Regular (R)	78
176-188	Tall (T)	82
188-194	Extra Tall (XT)	86



PVC wet suit



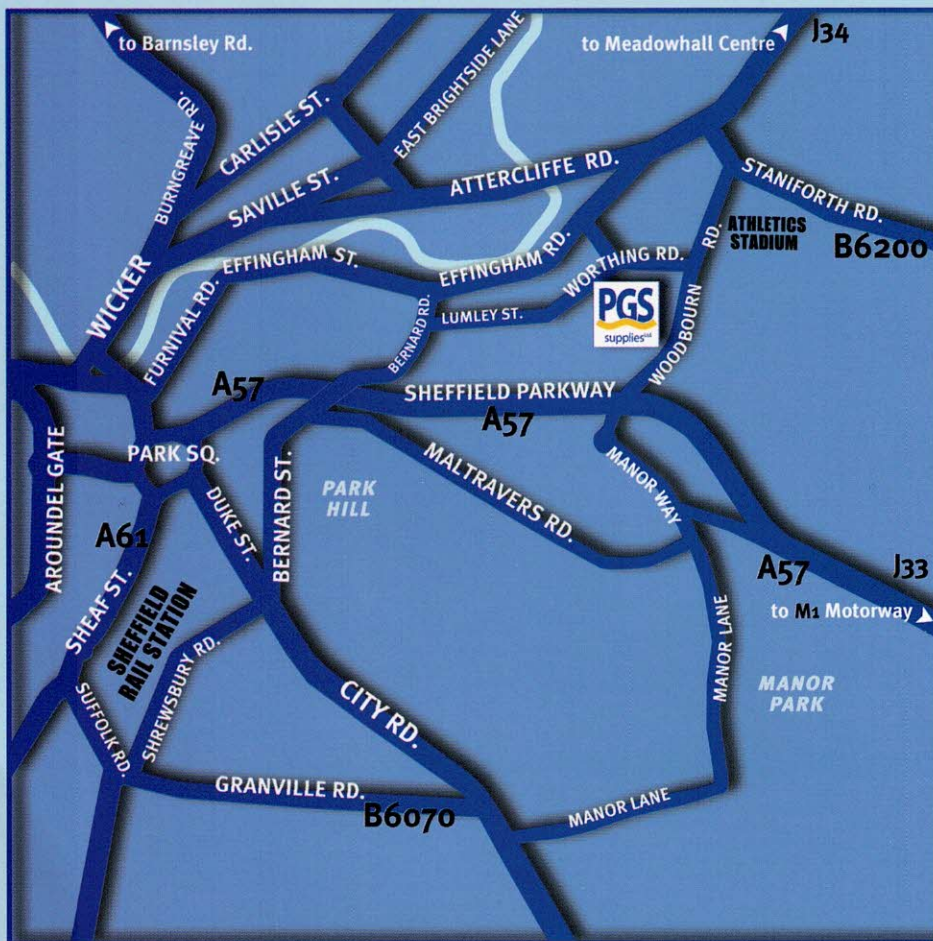

PGS Supplies Ltd.

Prospect Works, Worthing Road, Sheffield S9 3JB

Tel: 0114 276 55 66 Fax: 0114 276 52 65

E-mail: sales@pgs-supplies.co.uk

Website: <http://www.pgs-supplies.co.uk>