




Collared Eyebolt to BS4278 Table 4 1984 Imperial Thread (Tested and Certified) Specification Sheet

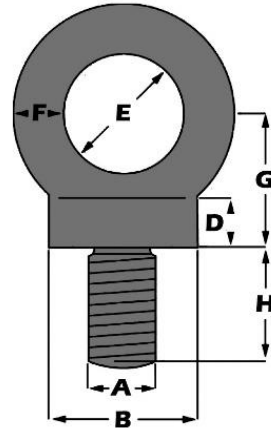

- Safe Working Load based on Vertical Lift
- * Not to Standard

A (Inches)	B (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	SWL Tonne	Weight (kgs)	Product Code
1/4"	22	7	15	9	20	18	0.10	0.07	ICE06*
5/16"	22	7	15	9	20	18	0.15	0.07	ICE08*
3/8"	22	7	15	9	20	18	0.25	0.07	ICE10
1/2"	29	11	20	12	26	23	0.50	0.07	ICE12
5/8"	36	12	24	14	32	28	0.90	0.16	ICE16
3/4"	45	14	30	17	40	34	1.40	0.44	ICE20
7/8"	52	17	35	21	46	40	2.00	0.56	ICE22
1"	58	17	39	23	52	46	2.75	0.84	ICE25
1 1/8"	65	22	44	26	58	51	3.50	1.41	ICE28
1 1/4"	72	24	48	29	64	56	4.50	2.24	ICE32
1 1/2"	86	29	57	33	76	67	6.50	3.92	ICE38
1 3/4"	101	34	68	40	90	79	9.00	6.00	ICE44
2"	115	38	76	44	102	89	12.00	9.00	ICE52
2 1/4"	128	50	86	51	114	100	15.00	13.00	ICE56